

GENERAL PURPOSE EXPLOSION-PROOF PRESSURE SENSOR MODEL 6-10EXP

The **Model 6-10EXP** is uniquely designed for use in a broad variety of applications where accurate, reliable, high performance pressure measurement is required.

The **Model 6-10EXP** utilizes a micro-machined silicon pressure sensor that is isolated for all media by a 316L stainless steel diaphragm. Silicon, as a material, tolerates very high bending stresses with virtually no hysteresis. This allows high electrical outputs with very little stress, which translates into excellent linearity, increased long-term stability & reliability.

Micro-machined silicon pressure sensors provide accuracies down to $\pm 0.25\%$ with effectively no hysteresis and a long-term drift of less than 0.25% FSO for one (1) year & proof pressures greater than 5X the rated pressure.

All **Model 6-10EXP** configurations have extremely robust EMI/RFI protection. The Model 6-10 will not shift, drift, or fail in an EMI/RFI environment of greater than 10 volts/meter up to 1.0GHz.


The **Model 6-10EXP** is hermetically sealed by welding & conforms to NEMA 4 & 4X enclosure requirements. (Except for vented gage configurations.)



*Wide Choice of
Pressure Ranges & Fittings*

*Highly
Corrosion Resistant*

*Exceptional
Long-term Stability*

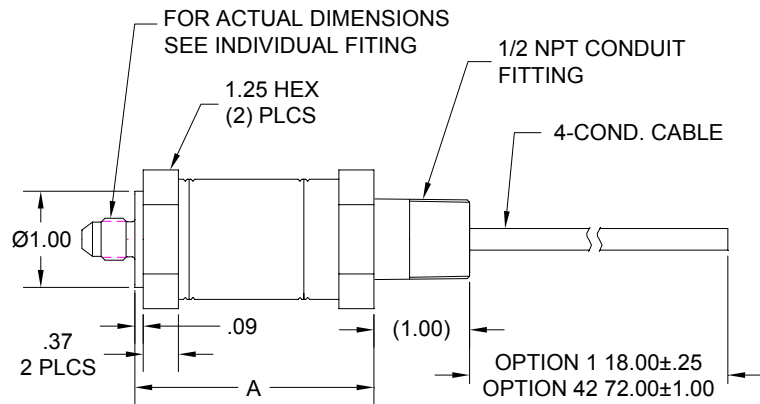

OVERALL DIMENSIONS
INCHES [mm]

TABULATION	
RANGE	"A"
3 TO 400 PSI	2.50 MAX [63.5]
401 TO 15K PSI	3.00 MAX [76.25]

4 WIRE	OPTION 1	OPTION 42
RED	+VOLTAGE IN	+VOLTAGE OUT
BLACK	COMMON	COMMON
WHITE	+VOLTAGE OUT	+VOLTAGE IN
GREEN	CASE GROUND	CASE GROUND
BARE	CABLE SHIELD	CABLE SHIELD

- *Process Control Systems*
- *Natural Gas Production*
- *Liquid Level Measurement*
- *Gas Compressors*
- *Chemical Processing Systems*
- *Wastewater Treatment*
- *Chemical Processing Systems*
- *Pulp & Paper Processing*

MODEL 6-10EXP

GENERAL PURPOSE EXPLOSION-PROOF PRESSURE TRANSDUCER

Product Specifications

Performance

Output Signal	See Chart 1
Accuracy L, R & H	±0.35%FSO (BFSL)
Zero & Span Offset	±0.25%FSO @ 21°C
Long-term Stability	±0.50%FSO/Year
Compensated Temperature	-10°C to 85°C (14°F to 185°F)
Temperature Effect	±1.0% Over the Compensated Temperature Range

Operating

Input Power	See Chart 1
Insulation Resistance	100 megohms @ 50 VDC
Dielectric Strength	250 VDC
Proof Pressure	150% of Rated Range
Burst Pressure	200% of Rated Range

Weight 0.25Kg (0.5lbs)

Environmental

Max Operating Temperature	-40°C to 120°C (-40°F to 250°F)
EMI/RFI	10volts/meter up to 1.0GHz
Wetted Parts	316L SST
Vibration	15 G's, 10-2000Hz
Shock	100 G's for 11ms, Half-sine
Enclosure	NEMA 4 & 4X (Except Vented Gage)

Certifications

EXPLOSION PROOF



APPROVED
CL I, DIV 1
GROUPS ABCD
T4 TYPE 4, 4X

Ordering Information

6 - 10 X - XX X X - XX

Instrument Family

6 = Micro-machined Silicon

Sensor Type

10 = Pressure Transducer

Reference Pressure

0 = Absolute 1 = Vented Gage 2 = Sealed Gage

Pressure Ranges **

00 = 3 PSI # †	08 = 100 PSI #	16 = 2000 PSI *
01 = 5 PSI # †	09 = 150 PSI #	17 = 3000 PSI *
02 = 15 PSI #	10 = 200 PSI #	18 = 5000 PSI *
03 = 20 PSI #	11 = 250 PSI #	19 = 6000 PSI *
04 = 25 PSI #	12 = 300 PSI #	20 = 7500 PSI *
05 = 30 PSI #	13 = 500 PSI *	21 = 10,000 PSI *
06 = 50 PSI #	14 = 1000 PSI *	22 = 15,000 PSI * †
07 = 60 PSI #	15 = 1500 PSI *	

Absolute & Vented Gage * Sealed Gage Only

** Calibration in bars available † Consult Factory

Pressure Fittings

0 = MS33656-E4 Male	3 = 1/8-27 NPT, Male
1 = 7/16-20 Straight, Male	4 = 1/4-18 NPT, Female
2 = 1/4-18 NPT, Male	5 = 1/2-14 NPT, Male

Electrical Connections

0 = 4-Wire Shielded Cable, 18 inch
42 = 4-Wire Shielded Cable, 72 inch

Custom Configurations (Chart 1)

	Output Signal	Input Power
00 =	0.5 - 5.0 VDC	10-32 VDC
0A =	0.05 - 5.0 VDC	10-32 VDC
0B =	0.5 - 5.5 VDC	10-32 VDC
0C =	1.0 - 5.5 VDC	10-32 VDC
0D =	1.0 - 6.0 VDC	10-32 VDC
0E =	0.1 - 10.0 VDC	16-32 VDC
0F =	1.0 - 11.0 VDC	16-32 VDC



SYSTEMS, L. L. C.
WWW.VSENSORS.COM

An Electromotive Solutions Company

ISO 9001:2000 & AS9100:2004 Certified

2800 ANVIL STREET NORTH ST. PETERSBURG, FL 33710 USA

PHONE: (727) 347-2181 Fax: (727) 347-7520 Email: sales@vsensors.com